



THE CARBON NANOTUBE SPECIALIST

NANO-ENGINEER YOUR FUTURE

EPOCYL

Ref: EPOCYL™ NC R1MY-02 – 17 March 2009 - V04

EPOCYL™ NC R1MY-02 Product Data: Dilution Factor 6.

Master Batch Liquid tetrafunctional epoxy Resin for Hot-Melt Formulation Purposes.

General information

Description

EPOCYL™ NC R1MY-02 is a Master Batch based on liquid tetrafunctional epoxy resin containing high concentration of Carbon Nanotubes (CNT) produced by Nanocyl, with a suggested dilution factor of 6. It is specifically developed to enhance the mechanical properties of final fiber reinforced composite materials. Special features include easy integration and great flexibility in design of new multifunctional materials.

Applications: high performance structural composite parts

- Automotive (bumpers and other structural parts)
- Marine, especially sailing boats (structural outer shell in carbon fiber composite, masts and other generic structural parts)
- Industrial parts (rollers, doctor-blades and wind-mill blades)
- Sporting equipments (bike frames, hockey sticks, tennis rackets, skis and golf shafts)
- Aerospace (structural parts and interiors)

Main direct advantages (demonstrated in specific final formulation)

- Improved fracture toughness (G1C) of over 100% = higher crack propagation/delamination resistance
- Improved failure strength: transverse and off-axis (+/- 45°) by over 15% = higher shear resistance
- Reduced CTE over 15% = less distorted parts produced
- No reduction in the Tg = possible to be used in any formulation

Additional advantages in general

- Electrical properties, induces antistatic properties in the composite parts: excellent for electrostatic painting application
- Flame resistance: higher resistance to flammability up to UL 94 level on the final fiber reinforced composite
- Better thermal dissipation: avoids hot-spots during curing, more homogenous temperature

Nanocyl S.A.

Rue de l'Essor 4 Tel +32 71 750 380
B-5060 Sambreville Fax +32 71 750 390
BELGIUM sales@nanocyl.com

US contact

info-us@nanocyl.com

www.nanocyl.com


Typical properties of EPOCYL™ NC R1MY-02

Visual Appearance:	Paste, black (Master Batch)
Viscosity @ 25°C*:	290 ± 55 Pa.s
Viscosity @ 60°C*:	20 ± 15 Pa.s
Epoxy Value:	8.36 – 8.91 eq/kg
Epoxy Equivalent:	112.2 – 119.5 g/eq
Density at 25°C:	1.15 – 1.18 g/ml
Storage temperature:	5°C

*measured with parallel plate in dynamic mode at 10 rad/s and a strain of 1%

Viscosity

Viscosity vs temperature profile: EPOCYL™ NC R1MY-02 (after diluting six times with neat liquid tetrafunctional epoxy resin versus neat with neat liquid tetrafunctional

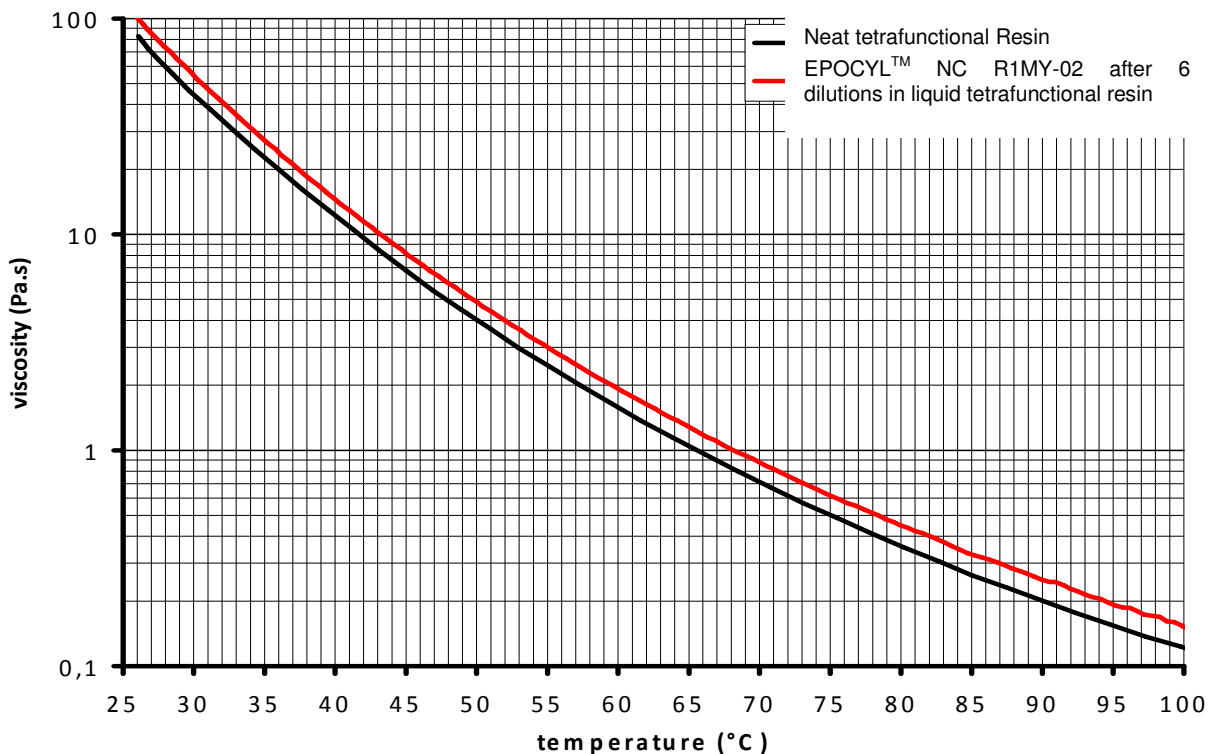

Curing agents

EPOCYL™ NC R1MY-02 based formulations can be cured or cross-linked with different types of curing agents which could be decided accordingly to the desired processing conditions and the properties of the final composite like any conventional tetrafunctional based formulations.

Nanocyl S.A.

Rue de l'Essor 4 Tel +32 71 750 380
 B-5060 Sambreville Fax +32 71 750 390
 BELGIUM sales@nanocyl.com

US contact

info-us@nanocyl.com



THE CARBON NANOTUBE SPECIALIST

NANO-ENGINEER YOUR FUTURE

EPOCYL

EPOCYL™ NC R1MY-02 / Product Data / Page 3

Guide to processing and to create a formulation based on EPOCYL™ NC R1MY-02

To achieve high **mechanical performances**, Nanocyl advises to dilute EPOCYL™ NC R1MY-02 six (6) times in the final resin formulation (resin & hardener).

For example: [EPOCYL™ NC R1MY-02 (17 %)] + [Neat resin + hardener + other additives (83 %)].

IMPORTANT: EPOCYL™ NCR1MY-02 is not an additive in your formulation, it is a substitution product for the equivalent parts of your conventional TGMDA liquid resin.

Dilution conditions

It is recommended to pre-mix the MB and if needed could be heated upto 45°-60° C to reduce its viscosity before introducing it into the formulation.

The Master Batch EPOCYL™ NC R1MY-02 could be mixed very easily with any liquid resins at room temperature (RT). If there is any solid resin/component part of final formulation (for example solid epoxies), solid part must be heated until it is nicely flowing melt and thereafter the other resin components can be added including EPOCYL™ NC R1MY-02.

Time, temperature and speed of the mixing may need to be adapted to obtain a final homogenous mixture. All common equipments available in any resin formulation, pre-preg and composite facilities are good to achieve a good and homogeneous mixture. The resin formulation must then be allowed to cool down.

Hardener must be added according to your conventional processing conditions. The amount of hardener required will depend on the final epoxy equivalent weight (EEW) of the formulation.

IMPORTANT: EPOCYL™ NC R1MY-02 IS NOT DESIGNED TO BE USED WITH SOLVENT.

Further impregnation and curing conditions after final resin formulation

Further processing (coating, fiber impregnation...) must be made according to your conventional processing conditions.

Important

All information is believed to be accurate but is given without acceptance of liability. Users should make their own assessment of the suitability of the product for their use and applications.

For technical assistance, sales or further information, please contact us:

Nanocyl S.A.

Rue de l'Essor 4 Tel +32 71 750 380
B-5060 Sambreville Fax +32 71 750 390
BELGIUM sales@nanocyl.com

US contact

info-us@nanocyl.com

www.nanocyl.com